

The Atlas Copco logo is positioned in the top right corner of the page. It consists of the brand name "Atlas Copco" in a white, italicized serif font, centered between two horizontal white bars. The background of the entire page is a photograph of a warehouse or industrial facility, showing tall metal shelving units filled with blue and grey barrels. In the foreground, a yellow Jungheinrich forklift is visible, with a worker in a high-visibility vest operating it. A large, semi-transparent blue graphic element, resembling a technical drawing or blueprint, is overlaid on the bottom left and center of the page, containing white line art of a compressor component and various technical specifications.

Roto Synthetic Fluid ULTRA

Atlas Copco Lubricants

High quality synthetic oil for demanding applications

With several years of experience on developing cutting edge technology on compressors, Atlas Copco has designed a unique additive package that enables the Roto Synthetic Fluid Ultra to work in harmony with all other components in the compressor.

Roto Synthetic Fluid ULTRA

Atlas Copco Lubricants


With extended service intervals of up to 4 000 hours when operating in demanding conditions, RS Ultra is a combination of a premium synthetic base fluid with an enhanced additive package to allow your compressor to operate in dusty and humid conditions and keeping your system deposit free. This combination (base oil and tailor-made additive package) ensures compressor protection and improves the energy consumption when comparing with our mineral lubricants.



	Features	Benefits
Excellent resistance against oxidation	Slows development of acids in the lubricant to extend oil life and maintain its properties within service intervals.	Longer drain intervals: up to 4 000 hours or 2 years even in demanding conditions.
Exceptional protection against deposit formation	Protection against sludge formation keeps the system clean and limits contamination through the oil separator.	A lower pressure drop through the oil separator reduces energy consumption.
High viscosity index	Oil viscosity remains at a more stable level, even at high temperatures.	This means lubricating efficiency and screw/bearing protection is maintained under varying conditions.
Good protection against corrosion	High hydrolytic stability prevents rust in case of water contamination.	Protects your investment, even when operating in very humid conditions or during standstill periods of transport or storage.
Outstanding demulsifying properties	High ability to separate from water, important during the lubricant cooling phase. The ability to separate during the condensate treatment process.	Protects against corrosion. Compatible with the Atlas Copco OSC & OSD condensate treatment devices with high purity separation.
Reduced oil consumption	Thanks to the combination of a tailor-made additive package and base oil, RS Ultra is less volatile.	Reduced oil "top-up" saves money and is good for the environment.
Increased lubricant lifetime	Longer service intervals will decrease the number of oil changes.	Saves costs on labor, lubricant disposal and purchase frequency. Environment friendly.



atlascopco.com

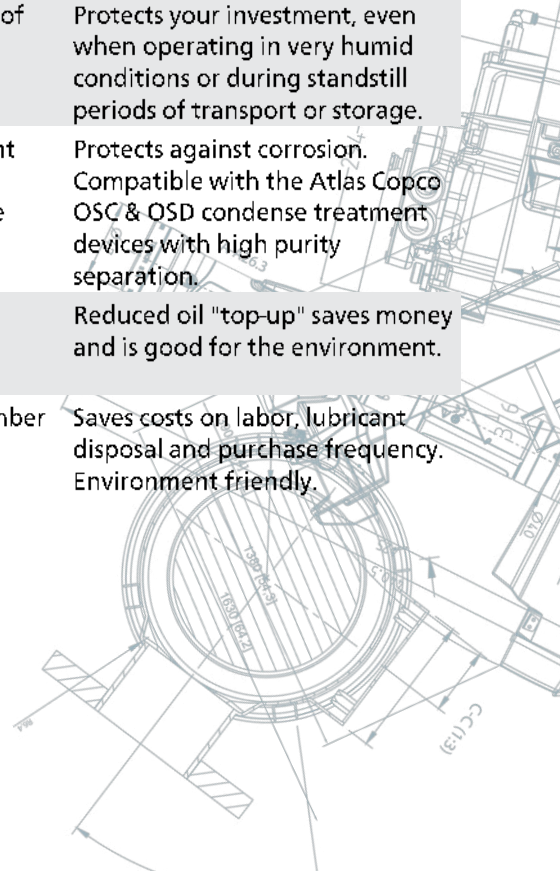

Lubricant characteristics


Appearance: Clear light brown

Performance	Method	Unit	Value
Density at 15°C	ISO 3675	kg/dm ³	0,832
Viscosity at 40°C	ASTM D 445	mm ² /s	45,25
Viscosity index	ASTM D 2270		144
Water separatebility at 54°C	ASTM D 1401	ml oil/water/emulsion	40/40/0 (5 min)
Foam stability	ASTM D 892	ml	0/0/0
Total acid number	ASTM D 974	mg KOH/g	0,09
NOACK evaporation	ASTM D 5800	%	2,0
Rust test	ASTM D 665B		Pass
Pour point	ASTM D 97	°C	-45

These characteristics are typical of current production. Whilst future production will conform to Atlas Copco's specification, variations in these characteristics may occur. Complies with ISO 6743 /3 /1A class L-DAH.

ID Card

Roto Synthetic Fluid ULTRA									
Oil type	Engineered synthetic based lubricant								
Service intervals	Up to 4 000h or 2 years at demanding ambient conditions (compressors) and 2 000h or 2 years (compressors with energy recovery system)								
Environment	Ambient temperature range from 0°C to +40°C & dusty environment or ambient temperature range from 0°C to +40°C & humid environment.								
	Compatible with operation in high humidity conditions								
	Compatible with high pressure equipment								
Equipment	Atlas Copco oil injected screws								
Compatibility	GA – GX – GN – GR compressors								
Capacity (ID)	<table border="0"> <tr> <td>5 l plastic can</td> <td>(1630 2041 05)</td> </tr> <tr> <td>20 l plastic can</td> <td>(1630 2041 20)</td> </tr> <tr> <td>209 l metal drum</td> <td>(1630 2041 29)</td> </tr> <tr> <td>1000 l container</td> <td>(1630 2041 00)</td> </tr> </table>	5 l plastic can	(1630 2041 05)	20 l plastic can	(1630 2041 20)	209 l metal drum	(1630 2041 29)	1000 l container	(1630 2041 00)
5 l plastic can	(1630 2041 05)								
20 l plastic can	(1630 2041 20)								
209 l metal drum	(1630 2041 29)								
1000 l container	(1630 2041 00)								

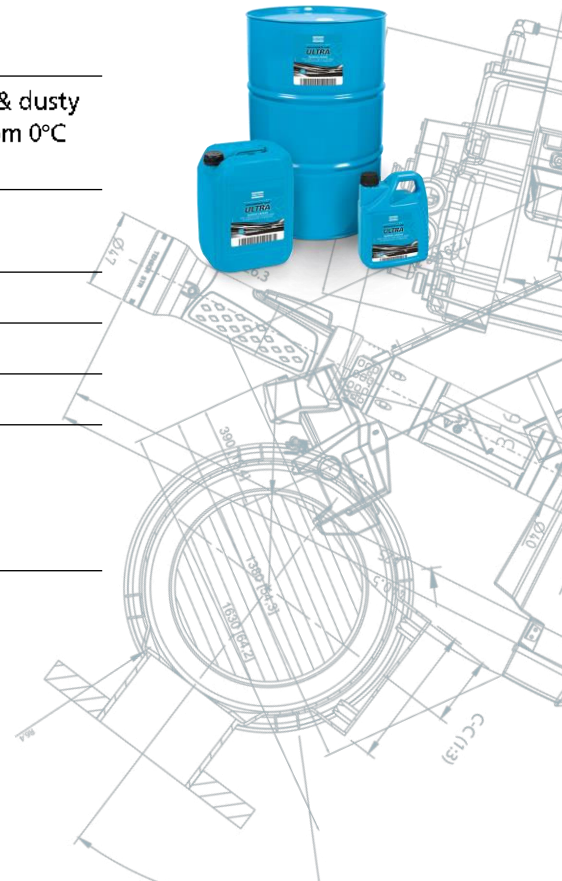

atlascopco.com